

Medium Temp.	R452A		R448A/ R449A		R454C		R455A		EN 13215 SH10										
Model Name	Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Max Absor. Current [A]	Housing	Dimensions [mm]			Weight	Fan	Liquid Receiver	Connections		Sound Level @10m
	-10°C	0°C	-10°C	0°C	-10°C	0°C	-10°C	0°C		Drawing	A	L	P	Net [kg]	Air Flow [m³/h]	[dm³]	Suction	Liquid	[dB(A)]
230 V / 1 phase / 50 Hz																			
HB2NEU62I2GL1AMA1	834	1214	808	1209	714	1077	813	1218	5.3	Housing 1	982	484	600	67	1695	1.6	3/8	1/4	28
HB2NEU60I5GL1AMA1	1102	1569	1087	1588	992	1476	1126	1665	6.7		982	982	982	67	1695	1.6	3/8	1/4	28
HB2NT6222GL-1AMA1	1316	1871	1314	1899	1255	1924	1395	2122	8.5		982	982	982	69	1695	1.6	1/2	1/4	29
HB2NT6224GL-1AMA1	1666	2419	1634	2400	1463	2324	1641	2600	9		982	982	982	69	1523	2.3	1/2	1/4	29
HB2NT6226GL-1AMA1	1807	2619	1801	2656	1625	2508	1809	2790	10.3		982	982	982	69	1523	2.3	1/2	1/4	29
HB2NJ9238GL-1AMA1	1934	2860	2044	3074	1943	2943	2158	3250	10.3		982	982	982	76	1523	2.3	5/8	3/8	30
HB2NTU6238GL1AMA1	2244	3201	2274	3287	2203	3097	2290	3384	16.7	Housing 2	982	982	982	76	1523	2.3	5/8	3/8	30
HB2ERFI5-CB-1AMA1	3778	5389	3818	5464	3437	4961	3778	5357	14.3		1082	1082	1082	92	2673	3.9	3/4	1/2	33
HB2ERFI9-CB-1AMA1	4481	6335	4527	6432	4078	5845	4469	6297	16.6		1082	1082	1082	92	2545	3.9	3/4	1/2	33
HB2ERF21-CB-1AMA1	5048	7136	4635	6580	4613	6607	5060	7108	18.4		1082	1082	1082	92	2545	3.9	3/4	1/2	33
400 V / 3 phases / 50 Hz																			
HB2NJ9232GM-1YMA1	2042	3045	2043	3071	1842	2752	2038	3022	4.2	Housing 1	982	484	600	76	1523	2.3	5/8	3/8	30
HB2NJ9238GM-1YMA1	2457	3506	2476	3565	2310	3392	2527	3685	4.4		982	484	600	76	1523	2.3	5/8	3/8	30
HB2NXJ6250GMIYMA1	3256	4607	3266	4721	3171	4670	3469	5059	6	Housing 2	1082	490	708	88	2673	3.9	5/8	3/8	34
HB2ERFI5-CA-1YMA1	3984	5577	3877	5546	3457	4988	3806	6009	5.7		1082	490	708	92	2673	3.9	3/4	1/2	33
HB2ERFI9-CA-1YMA1	4559	6442	4635	6580	4183	5990	4469	6297	6.3		1082	490	708	92	2545	3.9	3/4	1/2	33
HB2ERF21-CA-1YMA1	5117	7683	5209	7389	4703	6732	5167	7254	7		1082	490	708	92	2545	3.9	3/4	1/2	33
HB2ERF26-CA-1YMA1	6419	9214	6492	9344	5825	8454	6331	8993	8.5	Housing 3	1277	538	1005	107	5195	6	7/8	5/8	36
HB2ERF30-CA-1YMA1	7623	10870	7751	11086	6677	9399	7611	10774	9.9		1277	538	1005	107	5195	6	7/8	5/8	36
HB2ERF37-CA-1YMA1	8894	12583	8087	11594	7752	10802	8995	12673	11.7		1277	538	1005	107	4739	6	7/8	5/8	36

Low Temp.	R452A		R448A/ R449A		R454C		R455A		EN 13215 SH10										
Model Name	Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Cooling Cap. [W] @32°C		Max Absor. Current [A]	Housing	Dimensions [mm]			Weight	Fan	Liquid Receiver	Connections		Sound Level @10m
	-35°C	-30°C	-35°C	-30°C	-35°C	-30°C	-35°C	-30°C		Drawing	A	L	P	Net [kg]	Air Flow [m³/h]	[dm³]	Suction	Liquid	[dB(A)]
230 V / 1 phase / 50 Hz																			
HB2NT22I2GL-1ALA1	693	899	N/A	N/A	587	790	638	868	9.6	Housing 1	982	484	600	69	1523	2.3	1/2	1/4	29
HB2ELF07-CB-1ALA1	1326	1665	1327	1671	1183	1494	1324	1669	11.4	Housing 2	1082	490	708	92	2673	3.9	3/4	1/2	33
HB2ELF05-CB-1ALA1	1622	2041	1612	2033	1433	1813	1603	2028	14.3		1082	490	708	92	2673	3.9	3/4	1/2	33
HB2ELF09-CB-1ALA1	1816	2282	1815	2286	1615	2041	1810	2284	16.7		1082	490	708	92	2673	3.9	3/4	1/2	33
400 V / 3 phases / 50 Hz																			
HB2NX22I9GMIYLA1	1016	1338	N/A	N/A	938	1246	1014	1363	4.4	Housing 2	1082	490	708	88	2673	3.9	1/2	3/8	34
HB2ELF07-CA-1YLA1	1342	1686	1349	1698	1209	1527	1349	1700	4.7		1082	490	708	92	2673	3.9	1/2	1/2	33
HB2ELFI9-CA-1YLA1	1863	2316	1653	2085	1477	1869	1648	2085	5.8		1082	490	708	92	2673	3.9	1/2	3/8	33
HB2ELF09-CA-1YLA1	1842	2315	1850	2330	1657	2093	1850	2334	6.7		1082	490	708	92	2673	3.9	1/2	3/8	33
HB2ELFI2-CA-1YLA1	2254	2844	2253	2849	2011	2548	2238	2837	8.5	Housing 3	1277	538	1005	107	5195	6	7/8	1/2	36
HB2ELFI3-CA-1YLA1	2651	3323	2680	3368	2399	3023	2685	3374	9.4		1277	538	1005	107	5195	6	7/8	1/2	36
HB2ELFI7-CA-1YLA1	3195	4016	3222	4059	2884	3644	3223	4065	10.7		1277	538	1005	107	5195	6	7/8	1/2	36
HB2ELF20-CA-1YLA1	3829	4802	3878	4874	3480	4386	3894	4897	12.3		1277	538	1005	107	5195	6	7/8	1/2	36

embraco

think ahead

Nidec

BIOMA+

Hear nothing but endless possibilities



embraco

Nidec

think ahead

The quietest condensing unit of the range,
now more sustainable with A2L available.



Silent: with a robust design that absorbs vibrations, models range from 28 to 36 dB (A)



Robust design: Stackability and longitudinal airflow




Easy access to all internal components



Compressors compatible with several A1 and A2L refrigerants

Capacity of refrigeration

[kW]

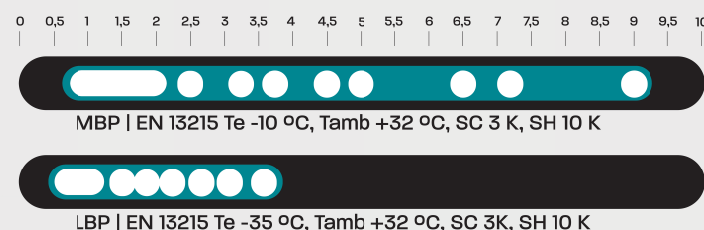


Main application:
Cold Room



Available in:

R452A | R448A | R449A
NEW A2L:
R454C and R455A

Engineered to positively impact.

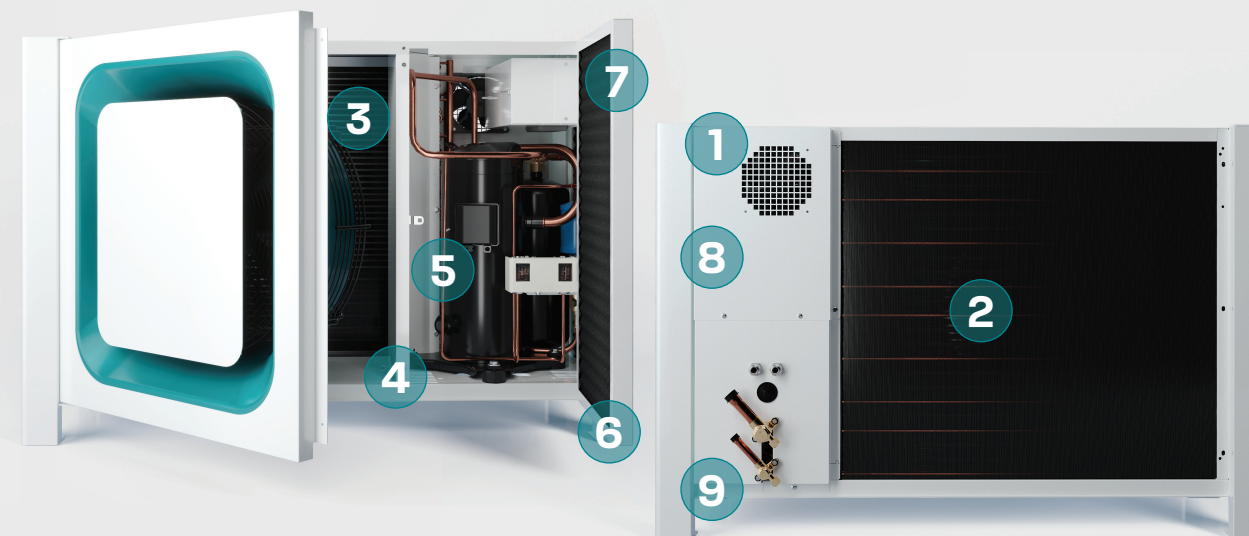

1. Safety

Bioma+ features a redesigned electrical box and extra fan for safer use with A2L refrigerants.

2. Condenser

Fin-and-tube design resists field conditions and simplifies maintenance with integrated fan access door.

3. Variable-speed fan

Adjusts condensation pressure, reducing noise and energy use; now A2L compatible.

4. Pressure switches

Dual adjustable switch with automatic reset for high and low pressure.

5. Compressor

Reciprocating or scroll models with heater, wide capacity, and temperature range; supports liquid injection.

6. 3 doors with lock

New three-door design with central access for faster, easier entry.

7. Foam insulation

Five-side insulation cuts noise and boosts performance.

8. Additional pressure relief valve

Ready for EN 378-2 compliant valve (optional).

9. Brazed connections

New brazed service valves for safer A2L handling.



embraco
toolboxapp

PSS

Product
Selector



Discover all that our digital solutions can do to support your business.