

CROSS REFERANCE EMBRACO X MARKET

220-240V 50HZ



embraco POWER IN.
CHANGE ON.

EMBRACO MODEL	Application	Displacement (cc)	ASHRAELBP32		ASHRAEHBP46	
			Capacity (W)	Efficiency (W/W)	Capacity (W)	Efficiency (W/W)
EM20HHR	L/M/HBP	2,27	50	0,85	230	2,20
EMIS30HHR	L/M/HBP	3	79	0,93	330	2,24
EMI45HER	LBP	3,77	100	1,16	-	-
EM45HHR	L/M/HBP	3,77	102	1,03	360	2,10
EMI55HER	LBP	4,6	123	1,23	-	-
EMI60HER	LBP	4,99	137	1,14	-	-
FF7,5HBK	L/M/HBP	6,9	154	1,00	590	2,08
EMI70HER	LBP	5,89	165	1,18	-	-
EGAS80HLR	LBP	6,36	192	1,54	-	-
FF8,5HBK	L/M/HBP	7,95	193	1,11	728	2,04
FFUS80HAK	L/MBP	6,76	201	1,37	-	-
FFUS100HAK	L/MBP	7,95	248	1,43	-	-
EGAS100HLR	LBP	7,95	249	1,52	-	-
FFU130HAX	L/MBP	10,61	308	1,38	-	-
FFI12HBK	L/M/HBP	11,14	316	1,25	1133	2,26
FFU160HAX	L/MBP	12,92	389	1,45	-	-
NEK2140Z	LBP	16,8	429	1,31	-	-
EM55HHR	HBP	4,6	-	-	455	2,08
EM65HHR	M/HBP	5,54	-	-	556	2,10
NEK6170Z	HBP	8,39	-	-	841	2,44
NEU6187Z	HBP	9,99	-	-	1018	2,44
NEU6210Z	HBP	12,11	-	-	1231	2,37 / 2,58
NEU6212Z	HBP	14,28	-	-	1483	2,31 / 2,52
NEU6214Z	HBP	16,8	-	-	1636	2,14 / 2,45
NT6217Z	HBP	20,44	-	-	1963	2,31 / 2,67
NT6220Z	HBP	22,37	-	-	2016	2,13 / 2,34
NTU6222ZV	HBP	23,74	-	-	2424	3,09
NTU6224ZV	HBP	27,8	-	-	2767	3,00
NJ6226Z	HBP	34,38	-	-	2976	2,41

KK MODEL	SECOP MODEL	HITACHI MODEL
AE 1320Y; AZ A1320YK; AZ A1320YK-R; AE 1320YK-R; AE 1320YK	PL35G; TL2.5F; TL2.5G; PL50F; TL3G; PL20F; PL35F; PLE50F	FL0424
AE 1327Y; AZ 1320Y-6; AZ 1327Y; AZ 33LY-1; AZ A1327YK; AZ A1327YK-K; AE 6LMY-1; AE 1330Y; AE V4LY-1; AE V4LY-2; AZ A1327YK-R; AZ A1330YK; AZ A1330YK-R; AZ A1330Y-6; AZ 0349Y; AZ 9349Y; AZ 0370Y-6	TLS3FT; TLES3F; TL4G; TL4F; GYV35AA AL; TLS4FT; TL3G; TL3F	FL0528; FL0634; FH0634; FH0739
AZ A1335YK-R; AZ 1335Y; AZ A1335YK; AZ A1335YK-6; AZ A1335Y; AZ A1335YK-K; AE 1340Y; AE V5LY-2; AZ A1340Y; AZ A1340YK; AZ A1340YK-R; AZ A2340Y	GVM38AA AL; TLES4F; TLY4F; GVM40AA AL	FL0739; FL0845
AE 3414Y; AE 3414Y-CR; AZ 3414Y; AZ A3414Y; AZ A0387Y; AZ A9387Y	TL5G; TL4GH	-
-	TL5F; GVM44AA AL; GYV44AA AL	FL1052; FL1152
AZ A1350YK-R; AZ A1350Y; AZ A1350Y-6; AZ A1350YK; AE 1350Y; AE V6LY-1; AE V6LY-2; AZ A1360Y; AZ A1360Y-6; AZ A1360YK; AZ A1360YK-R; AZ A2360Y	TLES5F; TLS5F; TLS5FT; TLY5FK; TLES6F; GYV57AA AL	FL1157
AE 8LMY-1	FR6G; FR7.5G	-
AZ A1370YK; AE 1360Y; AE 2360Y; BA 1360Y; AE V7LY-1; AE V7LY-2; AZ A1370YK-R; AZ A1370Y; AZ A1370YK-K; AZ A2370Y	NL6F; NL6.1FT; NL6FT; GVM57AA AL; TLES5.7FT.3; TLS7F	FL1257; FL1262; FL1462
AE 1370Y; AE 2370Y; AE V8LY-1; AE V8LY-2; BA 1370Y; AE 1370Y-H; AE 1390Y	GVM66AA AL; GYV66AA AL; TLES6.5FT.3; NL7.3FT; NL7FT; NL7F; NLY6F; NL8F; GYV75AA AL; NLE9F; NL9F; NLY7F; NL8.4FT; NL9FT	FL1675; FL1568; FL1875; FL1888
AE 4425Y; AE 4425Y-6A; AE 3425Y-6; AE 3425Y	FR8.5G; FR10G	FH2075
BA 9MHY-1	NF7FX; NL7.3MF; NL8.4MF	-
AE 12LMY-1; AE 14LMY-1; BA 10LMY-1; BA 12LMY-1; AE 7423Y; AE 7423Y-6	NF9FX; NLE10MF; NL10MF	-
BA 10LMY-1; AE 2390Y; AE 1390Y; AE V9LY-1; AE V9LY-2; BA 1390Y; AE 1390Y-6; AE 1410Y; AE 2410Y; AE 2410Y-F; AE A2410Y; BA 14LMY-1	NLY9FK; NL11F; NL10FT	FL2088
AE 1411Y; AE 1413Y; AE 2413Y; AE 2413Y-SR; AE A2413Y; BA 16LMY-1; BA 16LMY-2; BA 2413Y; AE 16LMY-2; AE 7426Y; BA 14LMY-1; BA 9426Y	NF11FX; SC12FT	-
AE 3440Y; AE 4440Y; AE 4440Y-SR; AE 4440Y-SRC; BA 4440Y; AE 4440Y-6; AE 4440Y-6SR	FR11G; SC10G; SC12G; SC15G; NF10FX	-
AE 2415Y; AE A2415Y; AE 2417Y-SR; AE 7430Y; BA 16LMY-1; BA 9430Y	SC15F; SC15FT; SC18F; SC15MFX	-
-	SC18FTX; SC21F	-
AE 3417Y	-	FH1045
AZ A0413YK; AE 7415Y; BA 8LMY-1	NL6.1MF	FH1552
AE 4430Y-6; BA 9MHY-1; AE 4430Y-6SRC; AE 4430Y-SR; AE 9417Y; AE 4430Y; AE 3430Y; AE 4435Y; AE 4435Y-6; AE 4435Y-SR; AE 9419Y	-	FH2588
AE 4440Y; AE 4440Y-SR	SC10GH; SC10GHH	-
BA 4448Y; BA 9426Y; AE 4448Y; AE 3448Y; AE 4448Y-SR; AE 4448Y-6	NL11MF	-
BA 4459Y; BA 9430Y; AE 4459Y-6; AE 4459Y-SR; BA 4462Y; BA 9437Y	SC15GH; SC15GHH	-
AE 9437Y-SR; BA 9437Y; CA 9437Y; BA 9440Y; WJ 9430YK-P; WJ 9430YK-SA	SC18GH	-
CA 20MHY; CA 7440Y; CA 9440Y; WJ 9440YK-P; WJ 9440YK-SA; CA 9445Y; CA 9445Y-6	SC18MFX	-
AE 9445Y; CA 9445Y; WJ 9445YK-P	SC21MFX	-
AW 4495YK; AW 4495YK-SA; WJ 9450YK-P; WJ 9450YK-SA; BA 4459Y	-	-
WJ 9460YK-P; WJ 9460YK-SA	GS26GHX	-
AW 4513YK; AW 4513YK-SA; WJ 9470Y	GS26MFX	-

EMBRACO MODEL	Application	Displacement (cc)	ASHRAELBP32		ASHRAEHBP46	
			Capacity (W)	Efficiency (W/W)	Capacity (W)	Efficiency (W/W)
EM20HHR	L/M/HBP	2,27	50	0,85	230	2,20
EMIS30HHR	L/M/HBP	3	79	0,93	330	2,24
EMI45HER	LBP	3,77	100	1,16	-	-
EM45HHR	L/M/HBP	3,77	102	1,03	360	2,10
EMI55HER	LBP	4,6	123	1,23	-	-
EMI60HER	LBP	4,99	137	1,14	-	-
FF7,5HBK	L/M/HBP	6,9	154	1,00	590	2,08
EMI70HER	LBP	5,89	165	1,18	-	-
EGAS80HLR	LBP	6,36	192	1,54	-	-
FF8,5HBK	L/M/HBP	7,95	193	1,11	728	2,04
FFUS80HAK	L/MBP	6,76	201	1,37	-	-
FFUS100HAK	L/MBP	7,95	248	1,43	-	-
EGAS100HLR	LBP	7,95	249	1,52	-	-
FFU130HAX	L/MBP	10,61	308	1,38	-	-
FFI12HBK	L/M/HBP	11,14	316	1,25	1133	2,26
FFU160HAX	L/MBP	12,92	389	1,45	-	-
NEK2140Z	LBP	16,8	429	1,31	-	-
EM55HHR	HBP	4,6	-	-	455	2,08
EM65HHR	M/HBP	5,54	-	-	556	2,10
NEK6170Z	HBP	8,39	-	-	841	2,44
NEU6187Z	HBP	9,99	-	-	1018	2,44
NEU6210Z	HBP	12,11	-	-	1231	2,37 / 2,58
NEU6212Z	HBP	14,28	-	-	1483	2,31 / 2,52
NEU6214Z	HBP	16,8	-	-	1636	2,14 / 2,45
NT6217Z	HBP	20,44	-	-	1963	2,31 / 2,67
NT6220Z	HBP	22,37	-	-	2016	2,13 / 2,34
NTU6222ZV	HBP	23,74	-	-	2424	3,09
NTU6224ZV	HBP	27,8	-	-	2767	3,00
NJ6226Z	HBP	34,38	-	-	2976	2,41

R404a

EMBRACO MODEL	Application	Displacement (cc)	ASHRAELBP32		ASHRAEHBP46	
			Capacity (W)	Efficiency (W/W)	Capacity (W)	Efficiency (W/W)
EMT2121GK	LBP	5,19	300	1,4	-	-
EMT2125GK	LBP	5,96	351	1,4	-	-
EMT2130GK	LBP	6,76	390	1,34	-	-
NEU2140GK	LBP	8,77	490	1,36	-	-
NEU2155GK	LBP	12,11	658	1,32	-	-
NEU2168GK	LBP	14,28	744	1,27 / 1,44	-	-
NEU2178GK	LBP	16,8	914	1,42	-	-
NT2192GK	LBP	22,37	1089	1,3 / 1,47	-	-
NJ2192GS	LBP	26,11	1128	1,23	-	-
NJ2212GK	LBP	34,38	1546	1,33	-	-
EMT6144GK	MBP	3,97	-	-	679	2,39
EMT6152GK	MBP	4,5	-	-	758	2,3
EMT6165GK	MBP	5,19	-	-	877	2,23
NEU6210GK	MBP	7,28	-	-	697	1,68
NEU6212GK	MBP	8,77	-	-	1438	2,23
NEU6215GK	MBP	12,11	-	-	1862	1,92 / 2,23
NT6220GK	MBP	14,5	-	-	2119	2,21
NT6222GK	MBP	17,39	-	-	2488	2,26
NT6224GKV	MBP	20,44	-	-	3023	2,38
NT6226GK	MBP	22,37	-	-	3221	2,09 / 2,44
NJ9226GS	MBP	21,71	-	-	3248	2,5
NTU6234GKV	MBP	23,74	-	-	3835	2,8
NJ9232GS	MBP	26,11	-	-	4030	2,5
NJ9238GK	MBP	32,67	-	-	4620	2,09
NJ9238GS	MBP	32,67	-	-	4839	2,55

R290

EMI50UER	L/MBP	3	126	1,28	-	-
EMI70UER	L/MBP	4,08	177	1,19	-	-
EMI90UEX	L/MBP	4,99	229	1,28	-	-
EM2X1121U	LBP	5,54	273	1,8	-	-
FFU130UAX / EM2X3125U	L/MBP	6,79/ 6,09	319/ 305	1,49/ 1,62	-	-
FFU160UAX	L/MBP	7,95	399	1,45	-	-
NEU2140U	LBP	9,99	485	1,49	-	-
NEU2155U	LBP	13,54	639	1,56	-	-
NEU2168U	LBP	16,8	788	1,53	-	-
NT2180UV	LBP	22,37	935	1,46	-	-
NT2210UV	LBP	27,8	1186	1,41	-	-
EMT6144U	MBP	4,5	-	-	616	2,62
NEU6181U	MBP	7,28	-	-	992	2,68
NEU6210U	MBP	8,77	-	-	1215	2,66
NEU6212U	MBP	9,99	-	-	1387	2,6 / 2,79
NEU6214U	MBP	12,11	-	-	1682	2,75
NEU6217U	MBP	14,28	-	-	1903	2,35 / 2,79
NEU6220U	MBP	16,8	-	-	2292	2,6

KK MODEL


SECOP MODEL

AE 2410UK; AE 2410ZK; AZ A2410Z; AE 2410ZK-SR	FR6CL
AE 2413ZK; AE 2413Z	
AE 2415UK; AE 2416ZK; AE 2416ZK-SR; AE 2416ZK	NL7CLX; SC10CL; NL8.4CLX
AE 2420ZK; AE 2420ZK-SR; AE 2420ZK-SR; AE 2420Z	SC12CL
AE 2425Z; AE 2425ZK-SR; BA 2425Z; AE 2425ZK	
AE 2428ZK-SR; BA 2428Z; AE 16LZ-1; WJ 2430ZK; WJ 2430ZK-P; WJ 2430ZK-SA; AE 2428ZK-SR; BA 2428Z; AE 2432ZK; CA 2432Z	SC15CLX.2; SC18CL; SC15CL; SC10/10CL
WJ 2435ZK; WJ 2435ZK-P; WJ 2435ZK-SA; WJ 22LZ-1; CA 2435Z; WJ 2440ZK; WJ 2440ZK-P; WJ 2440ZK-SA	SC12/12CL; SCE18CLX.2
AE 2440Z; CA 2440Z; WJ 2450ZK; WJ 2450ZK-P; WJ 2450ZK-SA; WJ 26LZ-3	SC21CL
WJ 2450Z-9	
AW 2462ZK; AW 2462ZK-P; AW 2462ZK-SA; AW 40LZ-1; AW 40LZ-3; AW 2464ZK; AW 2464ZK-SA; AW 43LZ-5; AW 43LZ-9; WJ 2460Z	SC15/15CL; GS26CLX; SC18/18CL

-	TL4DL
AE 4430Z	-
AE 9420Z	FR6DL; NL6.1MLX
BA 7440Z; AE 4440Z; AE 9426Z	NF7MLX
AE 9436UK; BA 9440Z	SC10DL
AE 9440U; CA 7475Z; BA 7443Z	SC12DL; SC10MLX; SC12MLX
AE 7452Z; BA 7452Z	SC15DLX.2; SC15MLX
BA 7459Z; CA 7459Z	-
CA 9465Z; BA 9440Z; CA 9465Z; WJ 9470Z	SC10/10DL; SC18MLX3
WJ 9470Z; WJ 9485Z	-
WJ 9485ZXT	-
WJ 9485Z; WJ 9490Z; WJ 9485Z; WJ 9490Z	GS21MLX; SC12/12DL
WJ 9490Z-9; WJ 4518E-9; WJ 9490Z-9; WJ 9490ZXT	-
WJ 9510Z; WJ 9510Z; AW 7512Z	GS26MLX
AW 7512ZXT; WJ 9510ZXT; AW 7512Z-9; AW 7512ZXT	-

-	TL3CN; TL4CN
-	TL4CN; DLE4CN
-	TL5CN; DLE4.8CN
AZ A2410N	
AZ A2413N	DLE5.7CN; DLE6.5CN; NL7CN; SC10CNX
-	NL9CN; NLE8.8CN
AE 2417N	SC12CNX.2; NLE11CNL
AE 2425N	NLE12.6CNL; SC15CNX.2
AE 2428N	SC18CNX.2
CA 2435N	SC21CNX.2
WJ 2450N	-

AE 9415N; AZ A0413N-6; AZA 9413N-6	-
AE 9422N	-
AE 9426N	-
AE 9430N; AE 9435N	SC10MNX
AE 9440N	SC12MNX; NLE12.6MN
AE 9445N	SC15MNX
AE 9450N	SC18MNX

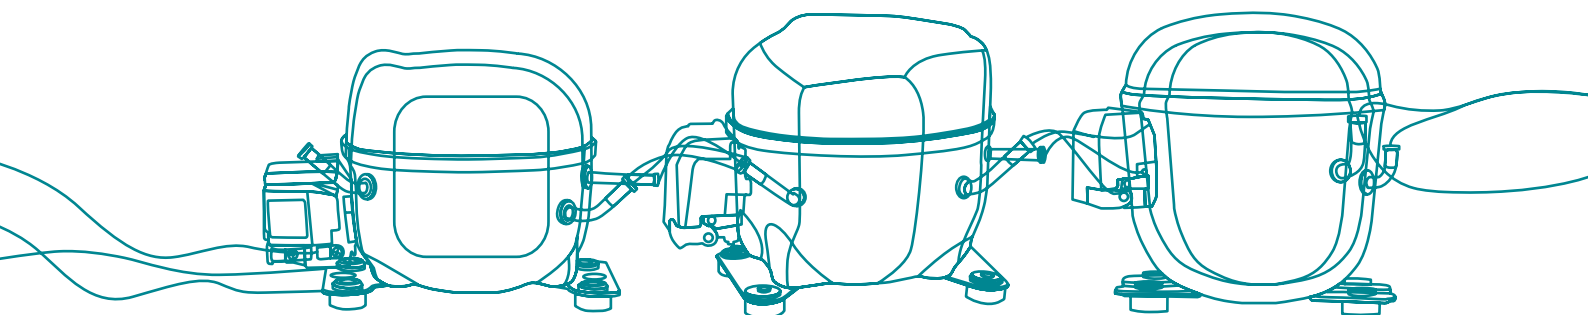

embraco.com